

Stand-alone speech diallers

Stand-alone speech diallers that can complement any system requiring alerts of changes in system conditions, including temperature monitoring. All messages are sent over GSM enabling SMS and speech messages, or standard PSTN line (SD3 only).



Personalised voice messages can be transmitted to up to ten recipients. A complete unit, with keypad and display for programming and set up. With built-in programmable outputs which can be operated remotely over PSTN or GSM.

The integrated microphone and speaker adds to the ability to listen in and speak to the site remotely.

At a glance...

- PSTN (SD3 only)
- GSM
- Up to ten recipients
- Built-in programmable outputs
- Built-in microphone and speaker remote site monitoring and communication




Powering Business Worldwide

Scantronic product data sheet

Product specification

Product Code	SD3	SD-GSM
Contacts	10	10
Messages	Speech: 8 SMS: 8	Speech: 8 SMS: 8
Power supply (V)	12-28	12-28
Operating temperature	-10 to +50	-10 to +50
Environmental	Class II	Class II
Antenna	External	External
ARC format	N/A	N/A
Max. number of inputs	8	8
Max. number of transistor outputs	4	4
Dimensions	100x25x150mm (hwxwd)	100x25x150mm (hwxwd)

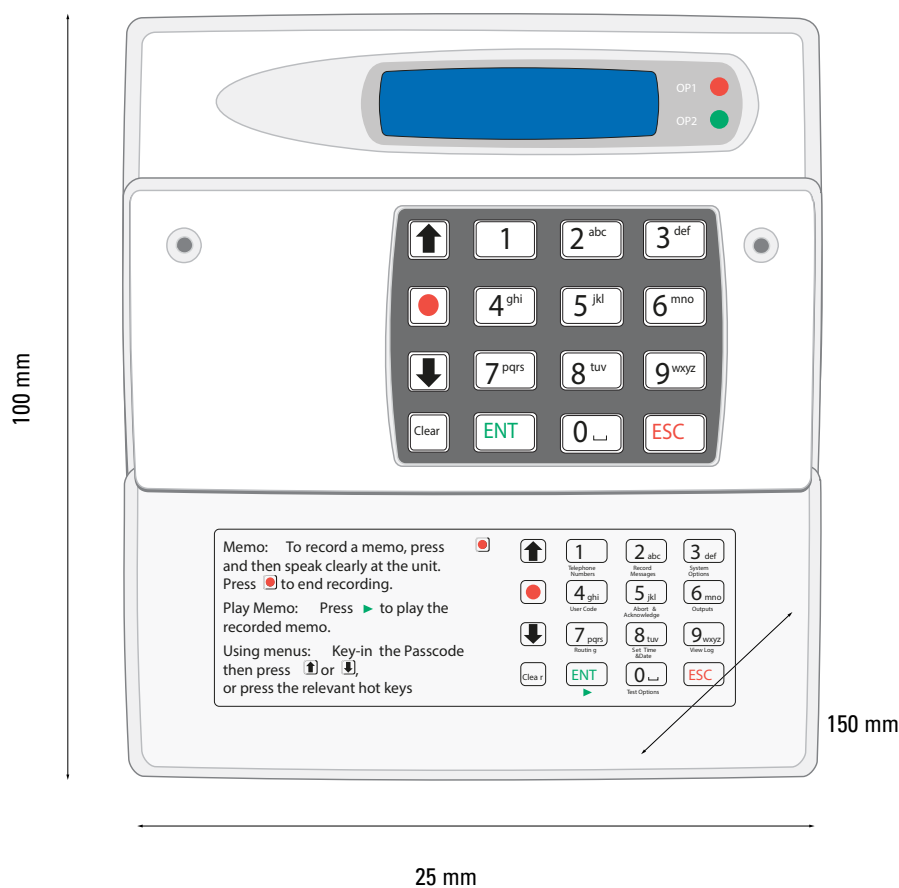

Compare product compatibility with our easy to read chart: www.eaton.com/security-works-with

Eaton
Electrical Sector
EMEA Route de la Longeraie 7
1110 Morges, Switzerland

Eaton Electrical Products Ltd
Security House,
Vantage Point Business Village,
Mitcheldean, Gloucestershire
GL17 0SX

Tel: +44 (0)1594 545 400
Email: securitysales@eaton.com
Web: www.myscantronic.com

Eaton is a registered trademark of Eaton Corporation.

All other trademarks are property of their respective owners.